



# GÉNÉRATEURS DE VIDE MUTI-ÉTAGÉS PVP 40 M, 70 M et 100 M

Débit d'air (NI/s) aux différents niveaux de vide (-Kpa)

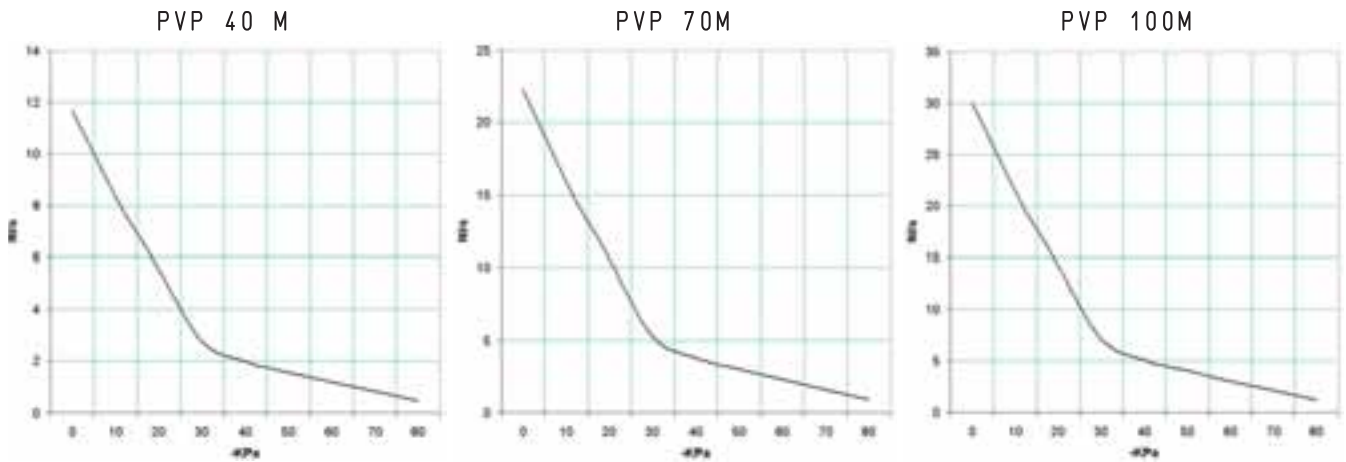

Générateur art.	Press. alim. bar	Consommation d'air NI/s	Débit d'air (NI/s) aux différents niveaux de vide (-KPa)										Vide max -KPa
			0	10	20	30	40	50	60	70	80	90	
<b>PVP 40 M</b>	6.0	3.2	11.66	8.32	5.55	2.77	1.98	1.58	1.19	0.83	0.47	90	
<b>PVP 70 M</b>	6.0	6.6	22.22	15.87	10.58	5.29	3.77	3.02	2.27	1.58	0.90	90	
<b>PVP 100 M</b>	6.0	9.8	30.00	21.42	14.28	7.14	5.10	4.08	3.06	2.14	1.22	90	

Temps d'évacuation (ms/l=s/m<sup>3</sup>) aux différents niveaux de vide (-Kpa)

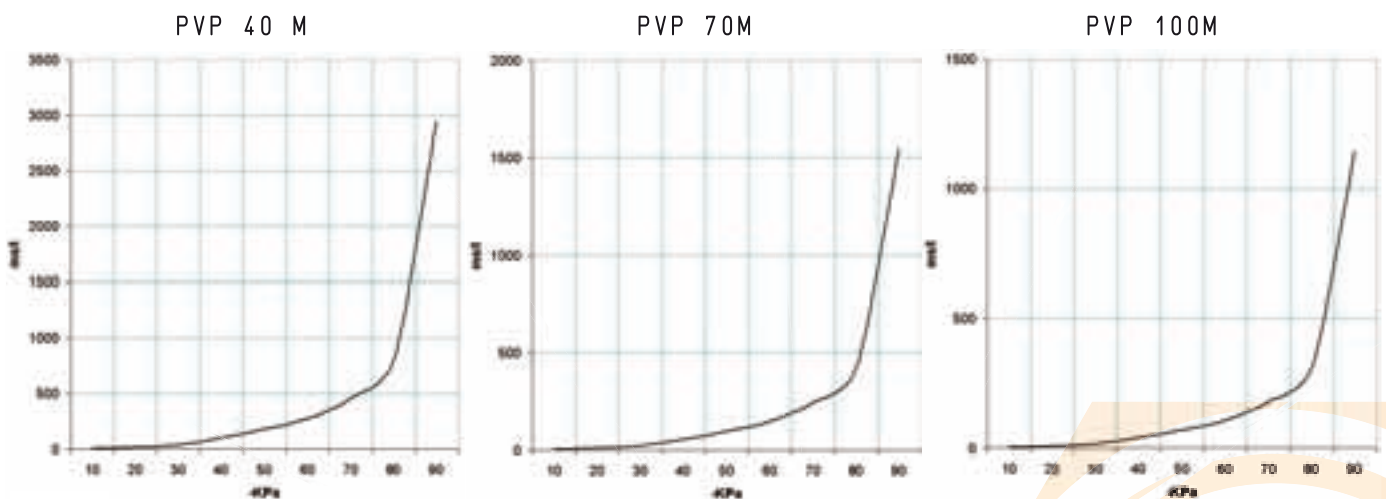

Générateur art.	Press. alim. bar	Consommation d'air NI/s	Temps d'évacuation (ms/l = s/m <sup>3</sup> ) aux différents niveaux de vide (-KPa)										Vide max -KPa
			10	20	30	40	50	60	70	80	90		
<b>PVP 40 M</b>	6.0	3.2	7.7	19.2	42.3	101.6	182.0	278.4	462.3	799.8	2943	90	
<b>PVP 70 M</b>	6.0	6.6	4.0	10.1	22.2	53.3	95.5	146.1	242.6	419.7	1544	90	
<b>PVP 100 M</b>	6.0	9.8	3.0	7.4	16.4	39.5	70.7	108.2	179.6	310.8	1144	90	