



# GÉNÉRATEURS DE VIDE MUTI-ÉTAGÉS PVP 140 M, 170 M et 200 M

Débit d'air (NI/s) aux différents niveaux de vide (-Kpa)

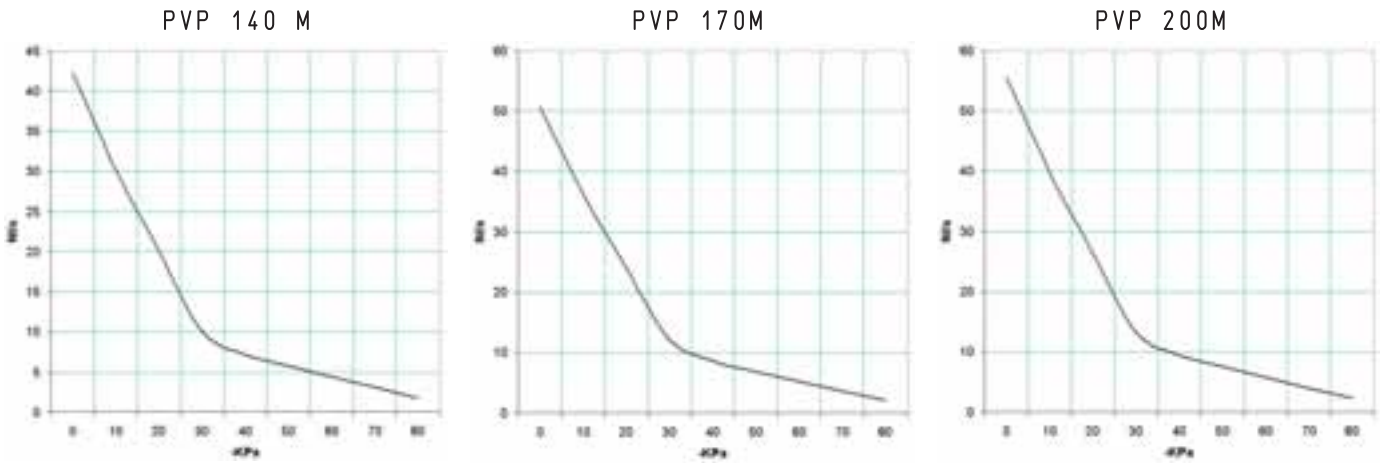

Générateur art.	Press. alim. bar	Consommation d'air NI/s	Débit d'air (NI/s) aux différents niveaux de vide (-KPa)										Vide max -KPa
			0	10	20	30	40	50	60	70	80	90	
<b>PVP 140 M</b>	6.0	13.0	42.22	30.15	20.10	10.05	7.18	5.74	4.31	3.02	1.72	90	
<b>PVP 170 M</b>	6.0	16.3	50.55	36.10	24.07	12.03	8.59	6.87	5.17	3.61	2.06	90	
<b>PVP 200 M</b>	6.0	19.4	55.55	39.67	26.45	13.22	9.44	7.55	5.68	3.97	2.27	90	

Temps d'évacuation (ms/l=s/m<sup>3</sup>) aux différents niveaux de vide (-Kpa)

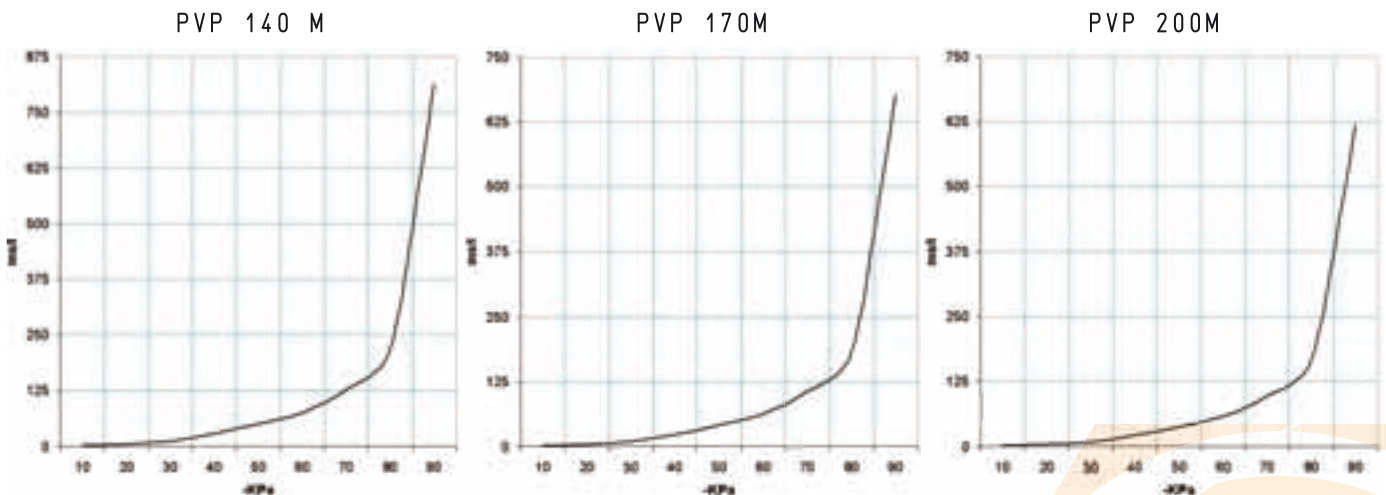

Générateur art.	Press. alim. bar	Consommation d'air NI/s	Temps d'évacuation (ms/l = s/m <sup>3</sup> ) aux différents niveaux de vide (-KPa)										Vide max -KPa
			10	20	30	40	50	60	70	80	90		
<b>PVP 140 M</b>	6.0	13.0	2.1	5.3	11.7	28.0	50.2	76.9	127.6	220.8	812	90	
<b>PVP 170 M</b>	6.0	16.3	1.7	4.4	9.7	23.4	42.0	64.2	106.6	184.5	678	90	
<b>PVP 200 M</b>	6.0	19.4	1.6	4.0	8.9	21.3	38.2	58.4	97.0	167.8	618	90	