
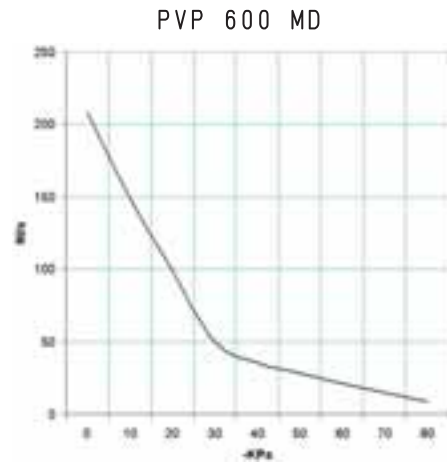




GÉNÉRATEURS DE VIDE MUTI-ÉTAGÉS, MODULAIRES, PVP 450 MD et 600 MD

Débit d'air (NI/s) aux différents niveaux de vide (-Kpa)

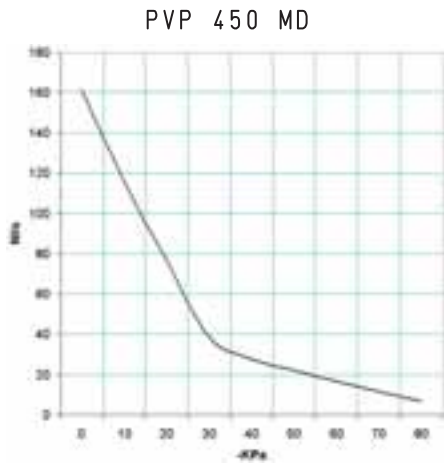

Générateur art.	Press. alim. bar	Consommation d'air NI/s	Débit d'air (NI/s) aux différents niveaux de vide (-KPa)										Vide max -KPa
			0	10	20	30	40	50	60	70	80		
PVP 450 MD	6.0	47.8	161.11	115.07	76.71	38.35	27.39	21.91	16.48	11.52	6.58	90	
PVP 600 MD	6.0	63.2	208.33	148.80	99.20	49.60	35.43	28.34	21.31	14.90	8.51	90	

Temps d'évacuation (ms/l=s/m³) aux différents niveaux de vide (-Kpa)

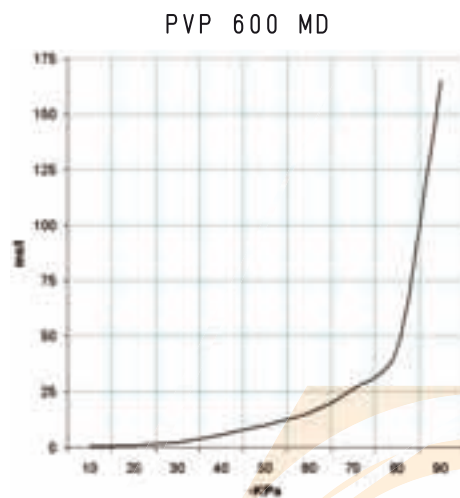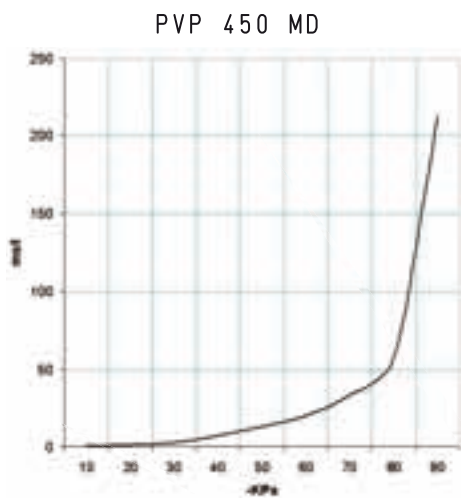

Générateur art.	Press. alim. bar	Consommation d'air NI/s	Temps d'évacuation (ms/l = s/m ³) aux différents niveaux de vide (-KPa)									Vide max -KPa
			10	20	30	40	50	60	70	80	90	
PVP 450 MD	6.0	47.8	0.5	1.4	3.0	7.4	13.2	20.1	33.5	57.9	213	90
PVP 600 MD	6.0	63.2	0.4	1.0	2.4	5.7	10.2	15.6	25.9	44.8	165	90