





# DIGITAL VACUUM AND PRESSURE SWITCHES WITH TWO-COLOUR DISPLAY

These devices are also enclosed within a robust ABS container. They are carefully calibrated and at compensated temperature, ensuring high-precision measurement values. Detected values are viewed on the main two-colour (red and green) display and programmable by the user to set different conditions. Setting values are easily viewable on a secondary display within the command panel. Two luminous indicators pertaining to outlets 1 and 2 indicate the switching status of both digital and the analogue output signals.

The switching outputs are completely independent.

The switching points within the scale values, including hysteresis, are easily programmable via the buttons located on the control panel. Additional functions are also programmable, such as comparison between two values, NO and NC contacts, choice of measurement unit, programmed value and function blocking, etc. The connection to the vacuum may be established by means of a male G 1/8" or female M5 double threading connection. It is possible to establish an electric connection by means of a removable, rapid installation data cable, supplied as standard.


Digital vacuum and pressure switches are suitable for measuring and controlling dry air and non-corrosive gases. They are recommended in all cases where maximum and minimum value signalling is required and set for safety reasons, in order to start a work cycle, control suction cup grip, and so on. With the hysteresis function, it is also possible to manage compressed air supply to vacuum generators, enabling considerable energy savings.

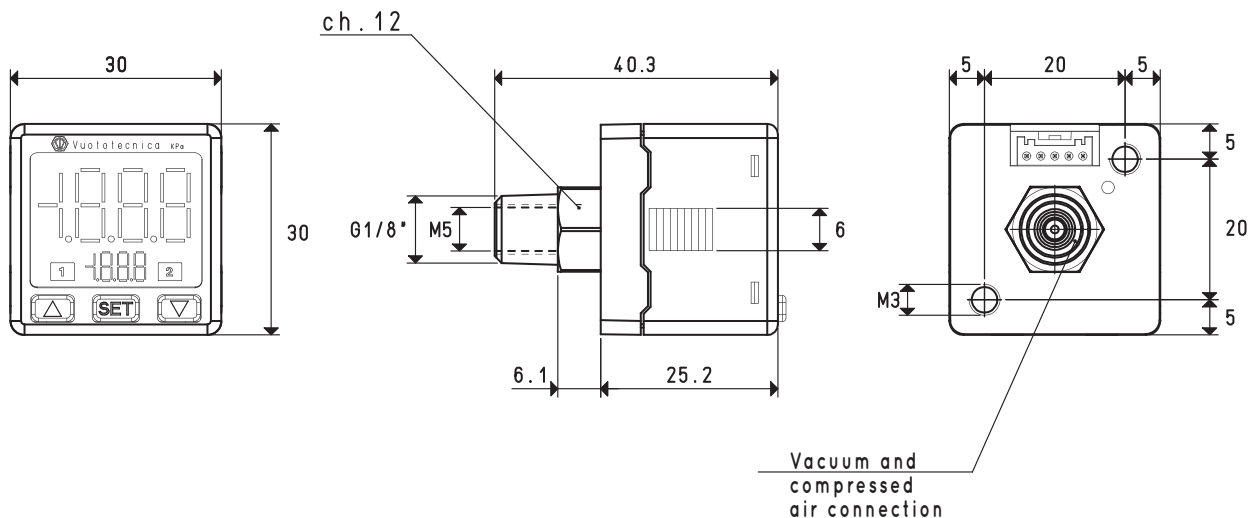



## ELECTRIC DIAGRAMS

PNP

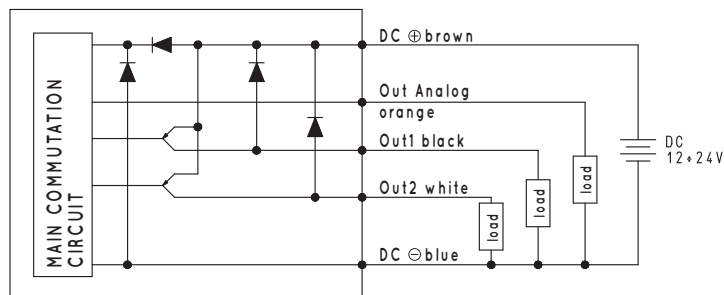

Electrical features and specifications	Item 12 40 10 Vacuum switch	Item 12 40 20 Vacuum switch - Pressure switch
<b>Adjustment range</b>	from 0 to -1 bar	from -1 to 10 bar
<b>Maximum overpressure</b>	3 bar	15 bar
<b>Minimum detected values</b>	1 mbar 0.001 Kgf/cm <sup>2</sup> 0.001 bar 0.01 psi 0.1 inHg	10 mbar 0.01 Kgf/cm <sup>2</sup> 0.01 bar 0.1 psi --
<b>Operating voltage</b>	12 ÷ 24 VDC, ±10% (Protection against polarity reversal)	
<b>Electrical absorption</b>	≤40 mA	
<b>Digital output</b>	2 PNP, max commutation power 125 mA	
<b>Analog output</b>	1 analog, 4 ÷ 20 mA ±2,5% F.S.	
<b>Display tolerance</b>	≤ ±2% F.S. ±1 digit	
<b>Reaction time</b>	≤ 2.5 ms	
<b>Hysteresis</b>	Adjustable	
<b>Repeatability</b>	±0.2% F.S. ±1 digit of the measuring range	
<b>Display</b>	7 segments, main two-colour (red - green) display, secondary display (orange)	
<b>Insulation resistance</b>	50 MΩ a 500 VDC	
<b>Proof voltage</b>	1000 VAC, 1 min	
<b>Protection class</b>	IP 40	
<b>Working environment conditions</b>		
<b>Installation position</b>	Any	
<b>Measurable fluids</b>	Non-corrosive gasses and dry air	
<b>Operating temperature</b>	0 ÷ +50 °C	
<b>Storage temperature</b>	-20 ÷ +60 °C	
<b>Emitted interference</b>	In compliance with EN 55011 Group 1, class B	
<b>Interference immunity</b>	In compliance with EN 61326 - 1	
<b>Mechanical features and specifications</b>		
<b>Container material</b>	ABS - PC plastic	
<b>Connection material</b>	Nickel-plated brass	
<b>Weight</b>	80 g, electric cable included	
<b>Electrical connection</b>	With 4-conductor cable length 2 m	
<b>Connection to fluid</b>	Male G1/8" and female M5 thread	
<b>Accessories</b>		
<b>Fixing kit</b>	wall - Item 00 12 40 plane - Item 00 12 41 panel - Item 00 12 42 to panel + protection - Item 00 12 43	